




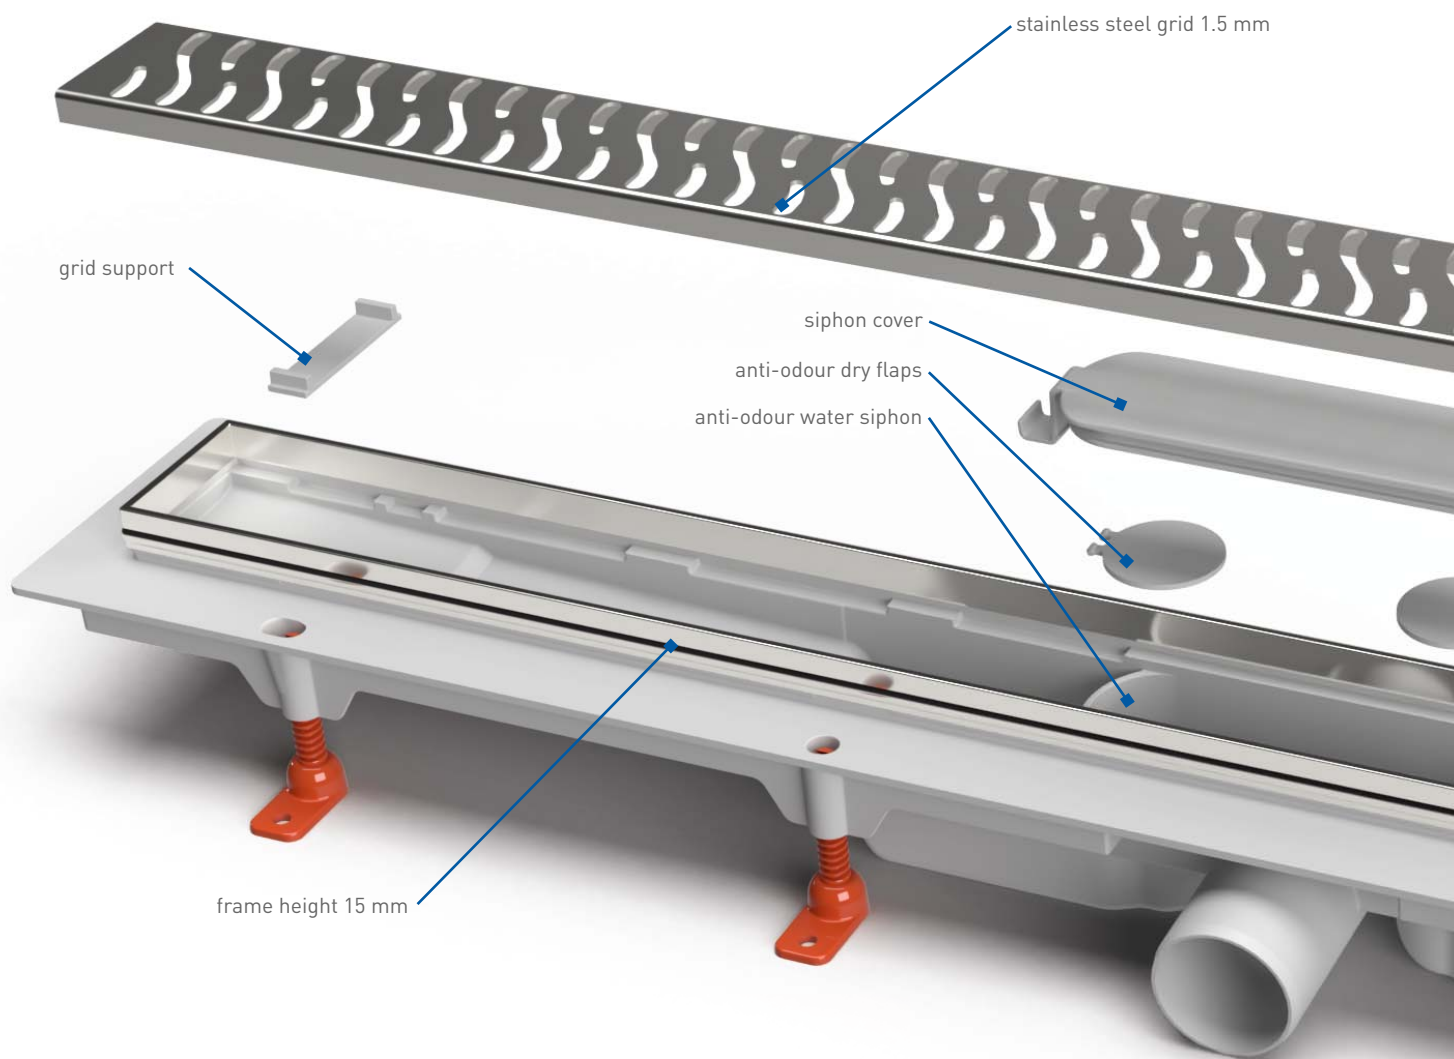


PLASTIC LINEAR FLOOR DRAINS

A shower linear floor drain is a must for absolutely every bathroom. Due to its unique anti-odour design, low installation height, high flow rate and wide assortment of stainless steel grids, it meets requirements of demanding clients - and is an ideal solution for your bathroom.

The bottom part is made from polypropylene, the frame and the grid are made from stainless steel DIN 1.4301, allowing for a K3 load (up to 300 kg). The minimum installation height is 65 mm, the drain is height adjustable. To connect to sewage pipes Ø 40/50 mm.

The package includes a self-adhesive waterproofing membrane, adjustable spacers, nylon plugs, a plastic key to remove the stainless steel grid and the assembly instructions.

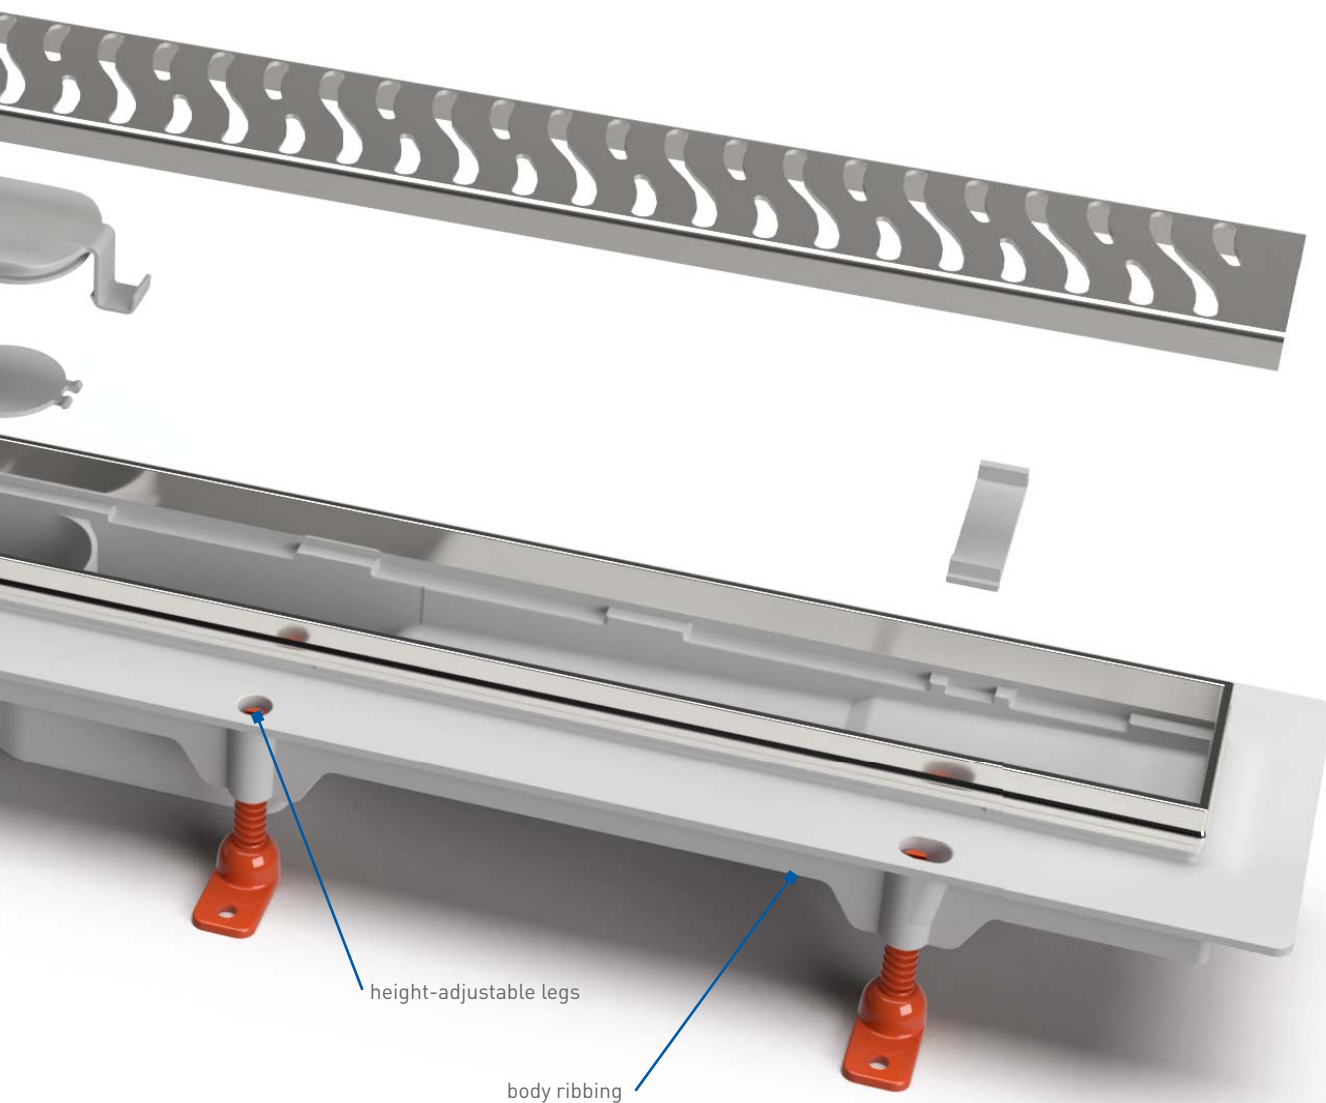

Grid types:


HARMONY



SQUARE



BASIC

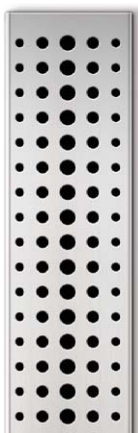

DROPS



MEDIUM



KLASIK/FLOOR






LINEAR FLOOR DRAIN WITH SIDE OUTLET D40



30-38 l/min.
 50 mm
 40 mm
 K3 - 300 kg

on request, we can produce this model in black

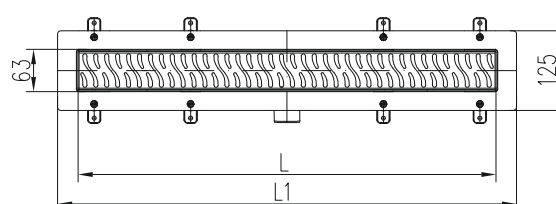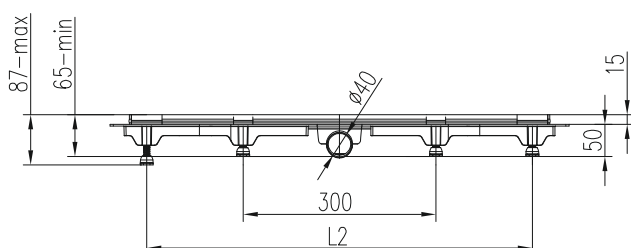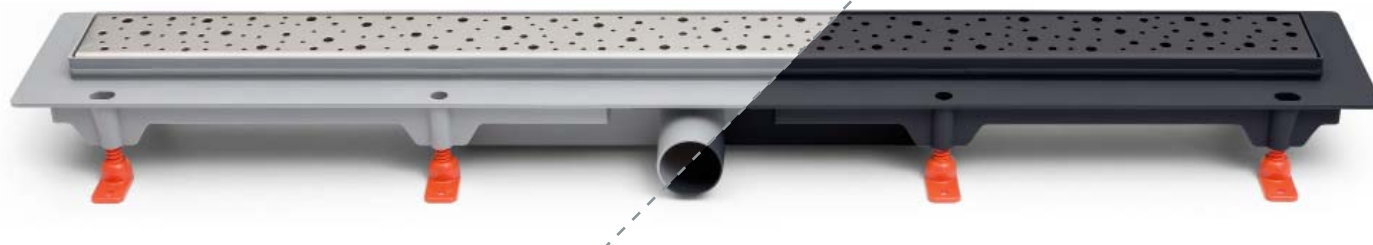

DRAIN FEATURES:



- ✓ low installation height 50 mm
- ✓ height adjustment between 65 to 87 mm
- ✓ flow rate 30-38 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ dimension range 350, 450, 550, 650, 750, 850, 950 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
350	415	295	1,04
450	515	295	1,19
550	615	295	1,32
650	715	595	1,71
750	815	695	1,85
850	915	795	2,02
950	1015	895	2,20

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
350 glossy	CH 350 H	CH 350 S	CH 350 B	CH 350 D	CH 350 M	CH 350 K
350 matt	CH 350 H 1	CH 350 S 1	CH 350 B 1	CH 350 D 1	CH 350 M 1	CH 350 K 1
450 glossy	CH 450 H	CH 450 S	CH 450 B	CH 450 D	CH 450 M	CH 450 K
450 matt	CH 450 H 1	CH 450 S 1	CH 450 B 1	CH 450 D 1	CH 450 M 1	CH 450 K 1
550 glossy	CH 550 H	CH 550 S	CH 550 B	CH 550 D	CH 550 M	CH 550 K
550 matt	CH 550 H 1	CH 550 S 1	CH 550 B 1	CH 550 D 1	CH 550 M 1	CH 550 K 1
650 glossy	CH 650 H	CH 650 S	CH 650 B	CH 650 D	CH 650 M	CH 650 K
650 matt	CH 650 H 1	CH 650 S 1	CH 650 B 1	CH 650 D 1	CH 650 M 1	CH 650 K 1
750 glossy	CH 750 H	CH 750 S	CH 750 B	CH 750 D	CH 750 M	CH 750 K
750 matt	CH 750 H 1	CH 750 S 1	CH 750 B 1	CH 750 D 1	CH 750 M 1	CH 750 K 1
850 glossy	CH 850 H	CH 850 S	CH 850 B	CH 850 D	CH 850 M	CH 850 K
850 matt	CH 850 H 1	CH 850 S 1	CH 850 B 1	CH 850 D 1	CH 850 M 1	CH 850 K 1
950 glossy	CH 950 H	CH 950 S	CH 950 B	CH 950 D	CH 950 M	CH 950 K
950 matt	CH 950 H 1	CH 950 S 1	CH 950 B 1	CH 950 D 1	CH 950 M 1	CH 950 K 1

30-38 l/min.
 50 mm
 40 mm
 K3 - 300 kg

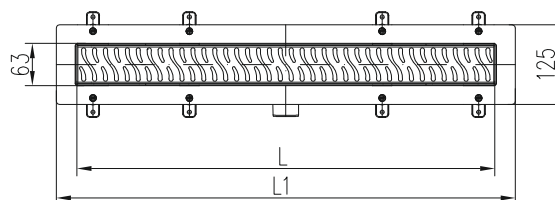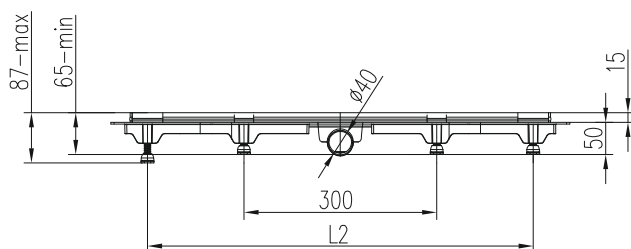

DRAIN FEATURES:

- ✓ low installation height 50 mm
- ✓ height adjustment between 65 to 87 mm
- ✓ flow rate 30-38 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ stainless steel frame
- ✓ dimension range 350, 450, 550, 650, 750, 850, 950 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
350	415	295	1,13
450	515	295	1,30
550	615	295	1,52
650	715	595	1,76
750	815	695	2,04
850	915	795	2,22
950	1015	895	2,42



PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
350 glossy	CH 350 HN	CH 350 SN	CH 350 BN	CH 350 DN	CH 350 MN	CH 350 KN
350 matt	CH 350 HN 1	CH 350 SN 1	CH 350 BN 1	CH 350 DN 1	CH 350 MN 1	CH 350 KN 1
450 glossy	CH 450 HN	CH 450 SN	CH 450 BN	CH 450 DN	CH 450 MN	CH 450 KN
450 matt	CH 450 HN 1	CH 450 SN 1	CH 450 BN 1	CH 450 DN 1	CH 450 MN 1	CH 450 KN 1
550 glossy	CH 550 HN	CH 550 SN	CH 550 BN	CH 550 DN	CH 550 MN	CH 550 KN
550 matt	CH 550 HN 1	CH 550 SN 1	CH 550 BN 1	CH 550 DN 1	CH 550 MN 1	CH 550 KN 1
650 glossy	CH 650 HN	CH 650 SN	CH 650 BN	CH 650 DN	CH 650 MN	CH 650 KN
650 matt	CH 650 HN 1	CH 650 SN 1	CH 650 BN 1	CH 650 DN 1	CH 650 MN 1	CH 650 KN 1
750 glossy	CH 750 HN	CH 750 SN	CH 750 BN	CH 750 DN	CH 750 MN	CH 750 KN
750 matt	CH 750 HN 1	CH 750 SN 1	CH 750 BN 1	CH 750 DN 1	CH 750 MN 1	CH 750 KN 1
850 glossy	CH 850 HN	CH 850 SN	CH 850 BN	CH 850 DN	CH 850 MN	CH 850 KN
850 matt	CH 850 HN 1	CH 850 SN 1	CH 850 BN 1	CH 850 DN 1	CH 850 MN 1	CH 850 KN 1
950 glossy	CH 950 HN	CH 950 SN	CH 950 BN	CH 950 DN	CH 950 MN	CH 950 KN
950 matt	CH 950 HN 1	CH 950 SN 1	CH 950 BN 1	CH 950 DN 1	CH 950 MN 1	CH 950 KN 1

LINEAR FLOOR DRAIN TO THE WALL WITH SIDE OUTLET D40



30-38 l/min.
 50 mm
 40 mm
 K3 - 300 kg

on request, we can produce this model in black

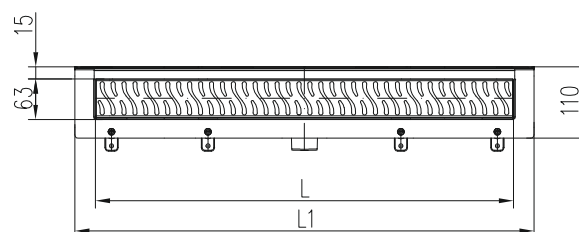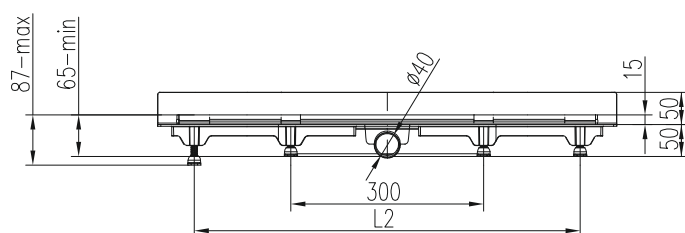

DRAIN FEATURES:



- ✓ low installation height 50 mm
- ✓ height adjustment between 65 to 87 mm
- ✓ flow rate 30-38 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ dimension range 350, 450, 650, 750, 850 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
350	415	295	1,15
450	515	295	1,30
650	715	595	1,79
750	815	695	1,93
850	915	795	2,14

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
350 glossy	CH 350 H 2	CH 350 S 2	CH 350 B 2	CH 350 D 2	CH 350 M 2	CH 350 K 2
350 matt	CH 350 H 3	CH 350 S 3	CH 350 B 3	CH 350 D 3	CH 350 M 3	CH 350 K 3
450 glossy	CH 450 H 2	CH 450 S 2	CH 450 B 2	CH 450 D 2	CH 450 M 2	CH 450 K 2
450 matt	CH 450 H 3	CH 450 S 3	CH 450 B 3	CH 450 D 3	CH 450 M 3	CH 450 K 3
650 glossy	CH 650 H 2	CH 650 S 2	CH 650 B 2	CH 650 D 2	CH 650 M 2	CH 650 K 2
650 matt	CH 650 H 3	CH 650 S 3	CH 650 B 3	CH 650 D 3	CH 650 M 3	CH 650 K 3
750 glossy	CH 750 H 2	CH 750 S 2	CH 750 B 2	CH 750 D 2	CH 750 M 2	CH 750 K 2
750 matt	CH 750 H 3	CH 750 S 3	CH 750 B 3	CH 750 D 3	CH 750 M 3	CH 750 K 3
850 glossy	CH 850 H 2	CH 850 S 2	CH 850 B 2	CH 850 D 2	CH 850 M 2	CH 850 K 2
850 matt	CH 850 H 3	CH 850 S 3	CH 850 B 3	CH 850 D 3	CH 850 M 3	CH 850 K 3

 30-38 l/min.
  50 mm
  40 mm
  K3 - 300 kg

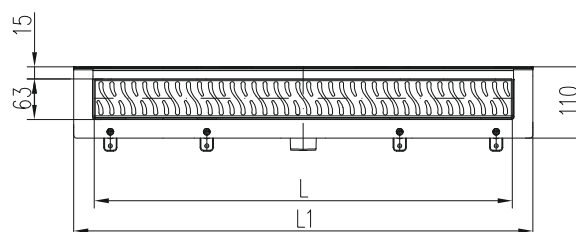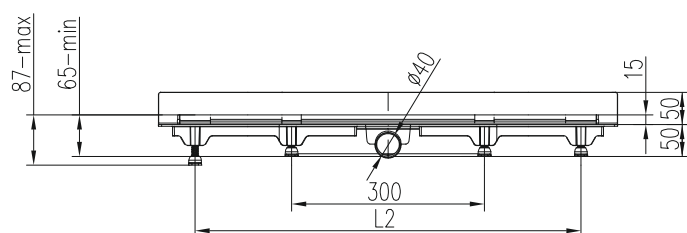

DRAIN FEATURES:

- ✓ low installation height 50 mm
- ✓ height adjustment between 65 to 87 mm
- ✓ flow rate 30-38 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ stainless steel frame
- ✓ dimension range 350, 450, 650, 750, 850 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
350	415	295	1,25
450	515	295	1,43
650	715	595	1,96
750	815	695	2,12
850	915	795	2,36



PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
350 glossy	CH 350 HN 2	CH 350 SN 2	CH 350 BN 2	CH 350 DN 2	CH 350 MN 2	CH 350 KN 2
350 matt	CH 350 HN 3	CH 350 SN 3	CH 350 BN 3	CH 350 DN 3	CH 350 MN 3	CH 350 KN 3
450 glossy	CH 450 HN 2	CH 450 SN 2	CH 450 BN 2	CH 450 DN 2	CH 450 MN 2	CH 450 KN 2
450 matt	CH 450 HN 3	CH 450 SN 3	CH 450 BN 3	CH 450 DN 3	CH 450 MN 3	CH 450 KN 3
650 glossy	CH 650 HN 2	CH 650 SN 2	CH 650 BN 2	CH 650 DN 2	CH 650 MN 2	CH 650 KN 2
650 matt	CH 650 HN 3	CH 650 SN 3	CH 650 BN 3	CH 650 DN 3	CH 650 MN 3	CH 650 KN 3
750 glossy	CH 750 HN 2	CH 750 SN 2	CH 750 BN 2	CH 750 DN 2	CH 750 MN 2	CH 750 KN 2
750 matt	CH 750 HN 3	CH 750 SN 3	CH 750 BN 3	CH 750 DN 3	CH 750 MN 3	CH 750 KN 3
850 glossy	CH 850 HN 2	CH 850 SN 2	CH 850 BN 2	CH 850 DN 2	CH 850 MN 2	CH 850 KN 2
850 matt	CH 850 HN 3	CH 850 SN 3	CH 850 BN 3	CH 850 DN 3	CH 850 MN 3	CH 850 KN 3

LINEAR FLOOR DRAIN WITH BOTTOM OUTLET D40



60-70 l/min.
 65 mm
 40 mm
 K3 - 300 kg

on request, we can produce this model in black

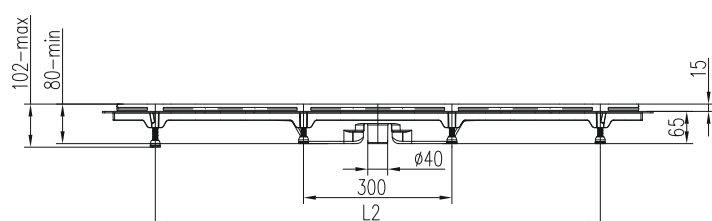

DRAIN FEATURES:



- ✓ installation height 65 mm
- ✓ height adjustment between 80 to 102 mm
- ✓ flow rate 60-70 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	715	595	1,75
750	815	695	1,86
850	915	795	2,14
950	1015	895	2,32
1050	1115	995	2,45

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH 650/S40 H	CH 650/S40 S	CH 650/S40 B	CH 650/S40 D	CH 650/S40 M	CH 650/S40 K
650 matt	CH 650/S40 H 1	CH 650/S40 S 1	CH 650/S40 B 1	CH 650/S40 D 1	CH 650/S40 M 1	CH 650/S40 K 1
750 glossy	CH 750/S40 H	CH 750/S40 S	CH 750/S40 B	CH 750/S40 D	CH 750/S40 M	CH 750/S40 K
750 matt	CH 750/S40 H 1	CH 750/S40 S 1	CH 750/S40 B 1	CH 750/S40 D 1	CH 750/S40 M 1	CH 750/S40 K 1
850 glossy	CH 850/S40 H	CH 850/S40 S	CH 850/S40 B	CH 850/S40 D	CH 850/S40 M	CH 850/S40 K
850 matt	CH 850/S40 H 1	CH 850/S40 S 1	CH 850/S40 B 1	CH 850/S40 D 1	CH 850/S40 M 1	CH 850/S40 K 1
950 glossy	CH 950/S40 H	CH 950/S40 S	CH 950/S40 B	CH 950/S40 D	CH 950/S40 M	CH 950/S40 K
950 matt	CH 950/S40 H 1	CH 950/S40 S 1	CH 950/S40 B 1	CH 950/S40 D 1	CH 950/S40 M 1	CH 950/S40 K 1
1050 glossy	CH 1050/S40 H	CH 1050/S40 S	CH 1050/S40 B	CH 1050/S40 D	CH 1050/S40 M	CH 1050/S40 K
1050 matt	CH 1050/S40 H 1	CH 1050/S40 S 1	CH 1050/S40 B 1	CH 1050/S40 D 1	CH 1050/S40 M 1	CH 1050/S40 K 1

60-70 l/min.
 65 mm
 40 mm
 K3 - 300 kg

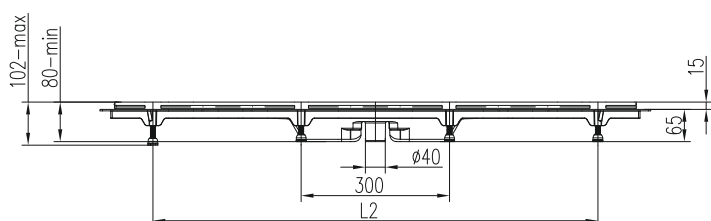

DRAIN FEATURES:

- ✓ installation height 65 mm
- ✓ height adjustment between 80 to 102 mm
- ✓ flow rate 60-70 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ stainless steel frame
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	715	595	1,89
750	815	695	2,04
850	915	795	2,34
950	1015	895	2,54
1050	1115	995	2,69



PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH 650/S40 HN	CH 650/S40 SN	CH 650/S40 BN	CH 650/S40 DN	CH 650/S40 MN	CH 650/S40 KN
650 matt	CH 650/S40 HN 1	CH 650/S40 SN 1	CH 650/S40 BN 1	CH 650/S40 DN 1	CH 650/S40 MN 1	CH 650/S40 KN 1
750 glossy	CH 750/S40 HN	CH 750/S40 SN	CH 750/S40 BN	CH 750/S40 DN	CH 750/S40 MN	CH 750/S40 KN
750 matt	CH 750/S40 HN 1	CH 750/S40 SN 1	CH 750/S40 BN 1	CH 750/S40 DN 1	CH 750/S40 MN 1	CH 750/S40 KN 1
850 glossy	CH 850/S40 HN	CH 850/S40 SN	CH 850/S40 BN	CH 850/S40 DN	CH 850/S40 MN	CH 850/S40 KN
850 matt	CH 850/S40 HN 1	CH 850/S40 SN 1	CH 850/S40 BN 1	CH 850/S40 DN 1	CH 850/S40 MN 1	CH 850/S40 KN 1
950 glossy	CH 950/S40 HN	CH 950/S40 SN	CH 950/S40 BN	CH 950/S40 DN	CH 950/S40 MN	CH 950/S40 KN
950 matt	CH 950/S40 HN 1	CH 950/S40 SN 1	CH 950/S40 BN 1	CH 950/S40 DN 1	CH 950/S40 MN 1	CH 950/S40 KN 1
1050 glossy	CH 1050/S40 HN	CH 1050/S40 SN	CH 1050/S40 BN	CH 1050/S40 DN	CH 1050/S40 MN	CH 1050/S40 KN
1050 matt	CH 1050/S40 HN 1	CH 1050/S40 SN 1	CH 1050/S40 BN 1	CH 1050/S40 DN 1	CH 1050/S40 MN 1	CH 1050/S40 KN 1

LINEAR FLOOR DRAIN WITH SIDE OUTLET D50



46-52 l/min.
 65 mm
 50 mm
 K3 - 300 kg

on request, we can produce this model in black

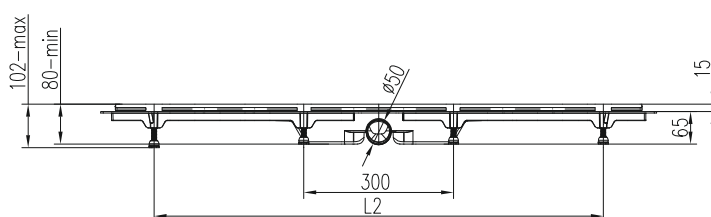

DRAIN FEATURES:



- ✓ installation height 65 mm
- ✓ height adjustment between 80 to 102 mm
- ✓ flow rate 46-52 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	715	595	1,76
750	815	695	1,89
850	915	795	2,17
950	1015	895	2,33
1050	1115	995	2,46

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH 650/50 H	CH 650/50 S	CH 650/50 B	CH 650/50 D	CH 650/50 M	CH 650/50 K
650 matt	CH 650/50 H 1	CH 650/50 S 1	CH 650/50 B 1	CH 650/50 D 1	CH 650/50 M 1	CH 650/50 K 1
750 glossy	CH 750/50 H	CH 750/50 S	CH 750/50 B	CH 750/50 D	CH 750/50 M	CH 750/50 K
750 matt	CH 750/50 H 1	CH 750/50 S 1	CH 750/50 B 1	CH 750/50 D 1	CH 750/50 M 1	CH 750/50 K 1
850 glossy	CH 850/50 H	CH 850/50 S	CH 850/50 B	CH 850/50 D	CH 850/50 M	CH 850/50 K
850 matt	CH 850/50 H 1	CH 850/50 S 1	CH 850/50 B 1	CH 850/50 D 1	CH 850/50 M 1	CH 850/50 K 1
950 glossy	CH 950/50 H	CH 950/50 S	CH 950/50 B	CH 950/50 D	CH 950/50 M	CH 950/50 K
950 matt	CH 950/50 H 1	CH 950/50 S 1	CH 950/50 B 1	CH 950/50 D 1	CH 950/50 M 1	CH 950/50 K 1
1050 glossy	CH 1050/50 H	CH 1050/50 S	CH 1050/50 B	CH 1050/50 D	CH 1050/50 M	CH 1050/50 K
1050 matt	CH 1050/50 H 1	CH 1050/50 S 1	CH 1050/50 B 1	CH 1050/50 D 1	CH 1050/50 M 1	CH 1050/50 K 1

46-52 l/min.
 65 mm
 50 mm
 K3 - 300 kg

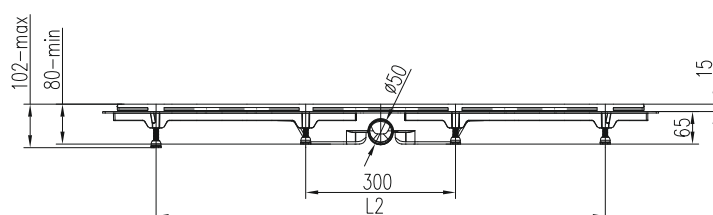

DRAIN FEATURES:

- ✓ installation height 65 mm
- ✓ height adjustment between 80 to 102 mm
- ✓ flow rate 46-52 l/min. according to EN 1253
- ✓ siphon with a water level combined with a dry flaps
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ stainless steel frame
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles



DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	715	595	1,91
750	815	695	2,06
850	915	795	2,36
950	1015	895	2,55
1050	1115	995	2,74

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH 650/50 HN	CH 650/50 SN	CH 650/50 BN	CH 650/50 DN	CH 650/50 MN	CH 650/50 KN
650 matt	CH 650/50 HN 1	CH 650/50 SN 1	CH 650/50 BN 1	CH 650/50 DN 1	CH 650/50 MN 1	CH 650/50 KN 1
750 glossy	CH 750/50 HN	CH 750/50 SN	CH 750/50 BN	CH 750/50 DN	CH 750/50 MN	CH 750/50 KN
750 matt	CH 750/50 HN 1	CH 750/50 SN 1	CH 750/50 BN 1	CH 750/50 DN 1	CH 750/50 MN 1	CH 750/50 KN 1
850 glossy	CH 850/50 HN	CH 850/50 SN	CH 850/50 BN	CH 850/50 DN	CH 850/50 MN	CH 850/50 KN
850 matt	CH 850/50 HN 1	CH 850/50 SN 1	CH 850/50 BN 1	CH 850/50 DN 1	CH 850/50 MN 1	CH 850/50 KN 1
950 glossy	CH 950/50 HN	CH 950/50 SN	CH 950/50 BN	CH 950/50 DN	CH 950/50 MN	CH 950/50 KN
950 matt	CH 950/50 HN 1	CH 950/50 SN 1	CH 950/50 BN 1	CH 950/50 DN 1	CH 950/50 MN 1	CH 950/50 KN 1
1050 glossy	CH 1050/50 HN	CH 1050/50 SN	CH 1050/50 BN	CH 1050/50 DN	CH 1050/50 MN	CH 1050/50 KN
1050 matt	CH 1050/50 HN 1	CH 1050/50 SN 1	CH 1050/50 BN 1	CH 1050/50 DN 1	CH 1050/50 MN 1	CH 1050/50 KN 1

 46-52 l/min.
  75 mm
  50 mm
  K3 - 300 kg

on request, we can produce this model in black

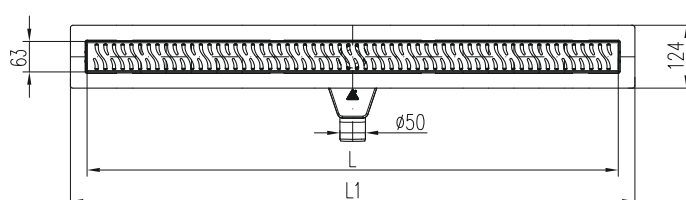

DRAIN FEATURES:



- ✓ installation height 75 mm
- ✓ flow rate 46-52 l/min. according to EN 1253
- ✓ 360 ° swivel siphon with removable silicone membrane and water level
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	Weight [kg/pc]
650	715	2,54
750	815	2,80
850	915	2,98
950	1015	3,32
1050	1115	3,55

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH PA 650 H	CH PA 650 S	CH PA 650 B	CH PA 650 D	CH PA 650 M	CH PA 650 K
650 matt	CH PA 650 H 1	CH PA 650 S 1	CH PA 650 B 1	CH PA 650 D 1	CH PA 650 M 1	CH PA 650 K 1
750 glossy	CH PA 750 H	CH PA 750 S	CH PA 750 B	CH PA 750 D	CH PA 750 M	CH PA 750 K
750 matt	CH PA 750 H 1	CH PA 750 S 1	CH PA 750 B 1	CH PA 750 D 1	CH PA 750 M 1	CH PA 750 K 1
850 glossy	CH PA 850 H	CH PA 850 S	CH PA 850 B	CH PA 850 D	CH PA 850 M	CH PA 850 K
850 matt	CH PA 850 H 1	CH PA 850 S 1	CH PA 850 B 1	CH PA 850 D 1	CH PA 850 M 1	CH PA 850 K 1
950 glossy	CH PA 950 H	CH PA 950 S	CH PA 950 B	CH PA 950 D	CH PA 950 M	CH PA 950 K
950 matt	CH PA 950 H 1	CH PA 950 S 1	CH PA 950 B 1	CH PA 950 D 1	CH PA 950 M 1	CH PA 950 K 1
1050 glossy	CH PA 1050 H	CH PA 1050 S	CH PA 1050 B	CH PA 1050 D	CH PA 1050 M	CH PA 1050 K
1050 matt	CH PA 1050 H 1	CH PA 1050 S 1	CH PA 1050 B 1	CH PA 1050 D 1	CH PA 1050 M 1	CH PA 1050 K 1

46-52 l/min.
 75 mm
 50 mm
 K3 - 300 kg
 * SS = stainless steel

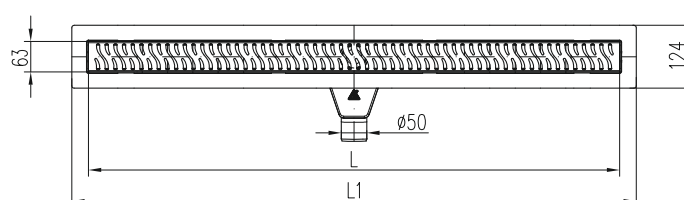

DRAIN FEATURES:

- ✓ installation height 75 mm
- ✓ flow rate 46-52 l/min. according to EN 1253
- ✓ 360 ° swivel siphon with removable silicone membrane and water level
- ✓ load capacity K3 (300 kg)
- ✓ stainless steel grid 1.5 mm glossy/matt
- ✓ stainless steel frame
- ✓ dimension range 650, 750, 850, 950, 1050 mm
- ✓ easy dismantling when cleaning
- ✓ frame height 15 mm
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	Weight [kg/pc]
650	715	2,74
750	815	3,00
850	915	3,18
950	1015	3,52
1050	1115	3,75

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH PA 650 HN	CH PA 650 SN	CH PA 650 BN	CH PA 650 DN	CH PA 650 MN	CH PA 650 KN
650 matt	CH PA 650 HN 1	CH PA 650 SN 1	CH PA 650 BN 1	CH PA 650 DN 1	CH PA 650 MN 1	CH PA 650 KN 1
750 glossy	CH PA 750 HN	CH PA 750 SN	CH PA 750 BN	CH PA 750 DN	CH PA 750 MN	CH PA 750 KN
750 matt	CH PA 750 HN 1	CH PA 750 SN 1	CH PA 750 BN 1	CH PA 750 DN 1	CH PA 750 MN 1	CH PA 750 KN 1
850 glossy	CH PA 850 HN	CH PA 850 SN	CH PA 850 BN	CH PA 850 DN	CH PA 850 MN	CH PA 850 KN
850 matt	CH PA 850 HN 1	CH PA 850 SN 1	CH PA 850 BN 1	CH PA 850 DN 1	CH PA 850 MN 1	CH PA 850 KN 1
950 glossy	CH PA 950 HN	CH PA 950 SN	CH PA 950 BN	CH PA 950 DN	CH PA 950 MN	CH PA 950 KN
950 matt	CH PA 950 HN 1	CH PA 950 SN 1	CH PA 950 BN 1	CH PA 950 DN 1	CH PA 950 MN 1	CH PA 950 KN 1
1050 glossy	CH PA 1050 HN	CH PA 1050 SN	CH PA 1050 BN	CH PA 1050 DN	CH PA 1050 MN	CH PA 1050 KN
1050 matt	CH PA 1050 HN 1	CH PA 1050 SN 1	CH PA 1050 BN 1	CH PA 1050 DN 1	CH PA 1050 MN 1	CH PA 1050 KN 1



waterproof insulation membrane

body support
(polystyrene)

STAINLESS STEEL LINEAR FLOOR DRAINS

The new AQUARIUS stainless steel (AISI 316) linear floor drain protects your bathroom, thanks to modern technology, from undesirable water leaks. These drains are not welded but pressed, so water does not penetrate through trough drain body.

Part of the drain is a special ALU grid, on which it is possible to stick tiles, glass, marble or stainless steel and thanks to special longitudinal grooves on the upper side of the grid they are tightly fixed.

The lengths of the stainless steel drains are 700, 800 and 900 mm. Adjustable grid supports allow you to unite perfectly grid height with floor height. In case of uneven tiling, a stainless steel frame can be ordered, which will compensate for these unevennesses.



The linear floor drain has a very small building height 62 mm only, so it can be used to a limited building space height. The load capacity K3 / 300 kg.



WELDING IS A THING OF THE PAST ...

AQUARIUS

 30-34 l/min.
  62 mm
  40 mm
  K3 - 300 kg

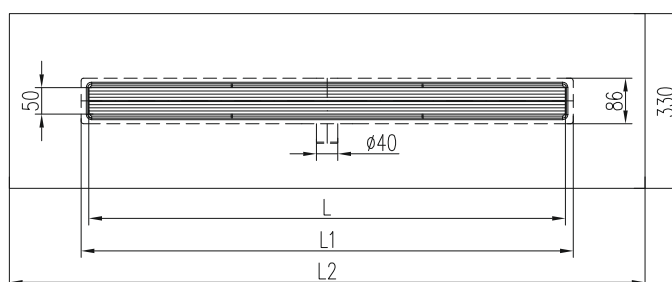


DRAIN FEATURES:

- ✓ low installation height 62 mm
- ✓ the adjustable support legs can be adjusted to any height
- ✓ on the ALU rail can be glued tiles, marble, glass, stainless steel grid
- ✓ flow rate 30-34 l/min. according to EN 1253
- ✓ the waterproof membrane is hermetically sealed at the factory
- ✓ load capacity K3 (300 kg)
- ✓ pressed body without welding
- ✓ dimension range 700, 800, 900 mm
- ✓ easy dismantling when cleaning
- ✓ without tiling height limit
- ✓ made of high resistant stainless steel DIN 1.4401 AISI 316
- ✓ patented drain siphon

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]	Weight [kg/pc]
			ALU grid	ALU + SS grid
700	735	1000	1,58	1,99
800	835	1100	1,71	2,17
900	935	1200	1,85	2,36



➔ ALU grid + tiles



➔ ALU grid + stainless steel



PART NUMBER		
	ALU grid	ALU grid + stainless steel
700	CH N 7001	CH N 7005
800	CH N 8001	CH N 8005
900	CH N 9001	CH N 9005

STAINLESS STEEL LINEAR FLOOR DRAIN WITH SIDE OUTLET D40



30-34 l/min.
 62 mm
 40 mm
 K3 - 300 kg

AQUARIUS

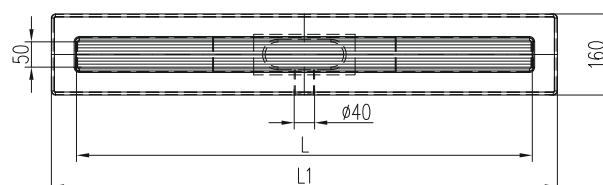


DRAIN FEATURES:

- ✓ low installation height 62 mm
- ✓ the adjustable support legs can be adjusted to any height
- ✓ on the ALU rail can be glued tiles, marble, glass, stainless steel grid
- ✓ flow rate 30-34 l/min. according to EN 1253
- ✓ load capacity K3 (300 kg)
- ✓ pressed body without welding
- ✓ dimension range 700, 800, 900 mm
- ✓ easy dismantling when cleaning
- ✓ without tiling height limit
- ✓ made of high resistant stainless steel DIN 1.4401 AISI 316
- ✓ patented drain siphon

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	Weight [kg/pc]	Weight [kg/pc]
		ALU grid	ALU + SS grid
700	800	1,97	2,38
800	900	2,17	2,63
900	1000	2,36	2,87




➔ ALU grid + tiles



➔ ALU grid + stainless steel

PART NUMBER		
	ALU grid	ALU grid + stainless steel
700	CH N 7002	CH N 7006
800	CH N 8002	CH N 8006
900	CH N 9002	CH N 9006

 46-50 l/min.
  70 mm
  50 mm
  K3 - 300 kg
 * WP = waterproof

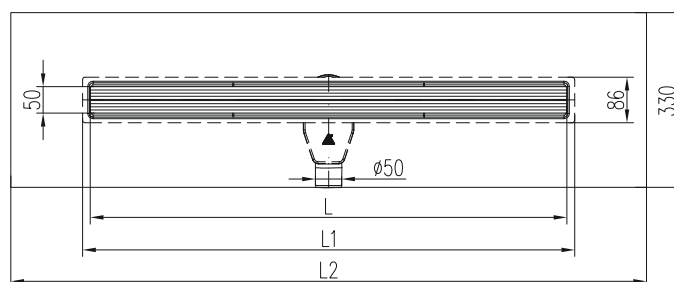


DRAIN FEATURES:

- ✓ installation height 70 mm
- ✓ the adjustable support legs can be adjusted to any height
- ✓ on the ALU rail can be glued tiles, marble, glass, stainless steel grid
- ✓ flow rate 46-50 l/min. according to EN 1253
- ✓ the waterproof membrane is hermetically sealed at the factory
- ✓ load capacity K3 (300 kg)
- ✓ pressed body without welding
- ✓ dimension range 700, 800, 900 mm
- ✓ easy dismantling when cleaning
- ✓ without tiling height limit
- ✓ made of high resistant stainless steel DIN 1.4401 AISI 316
- ✓ patented drain siphon

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]	Weight [kg/pc]
			ALU grid	ALU + SS grid
700	735	1000	1,78	2,19
800	835	1100	1,94	2,40
900	935	1200	2,10	2,58



➔ ALU grid + tiles



➔ ALU grid + stainless steel


PART NUMBER		
	ALU grid	ALU grid + stainless steel
700	CH N 7003	CH N 7007
800	CH N 8003	CH N 8007
900	CH N 9003	CH N 9007

STAINLESS STEEL LINEAR FLOOR DRAIN WITH SWIVEL SIDE SIPHON D50



46-50 l/min.
 70 mm
 50 mm
 K3 - 300 kg

AQUARIUS

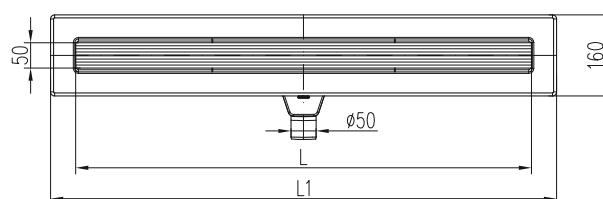


DRAIN FEATURES:

- ✓ installation height 70 mm
- ✓ the adjustable support legs can be adjusted to any height
- ✓ on the ALU rail can be glued tiles, marble, glass, stainless steel grid
- ✓ flow rate 46-50 l/min. according to EN 1253
- ✓ load capacity K3 (300 kg)
- ✓ pressed body without welding
- ✓ dimension range 700, 800, 900 mm
- ✓ easy dismantling when cleaning
- ✓ without tiling height limit
- ✓ made of high resistant stainless steel DIN 1.4401 AISI 316
- ✓ patented drain siphon

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	Weight [kg/pc]	Weight [kg/pc]
		ALU grid	ALU + SS grid
700	800	2,17	2,58
800	900	2,40	2,85
900	1000	2,58	3,10



➔ ALU grid + tiles




➔ ALU grid + stainless steel

PART NUMBER		
	ALU grid	ALU grid + stainless steel
700	CH N 7004	CH N 7008
800	CH N 8004	CH N 8008
900	CH N 9004	CH N 9008

STAINLESS STEEL LINEAR FLOOR DRAIN WITH PLASTIC SWIVEL SIDE SIPHON D50



42-48 l/min.
 59 mm
 50 mm
 K3 - 300 kg

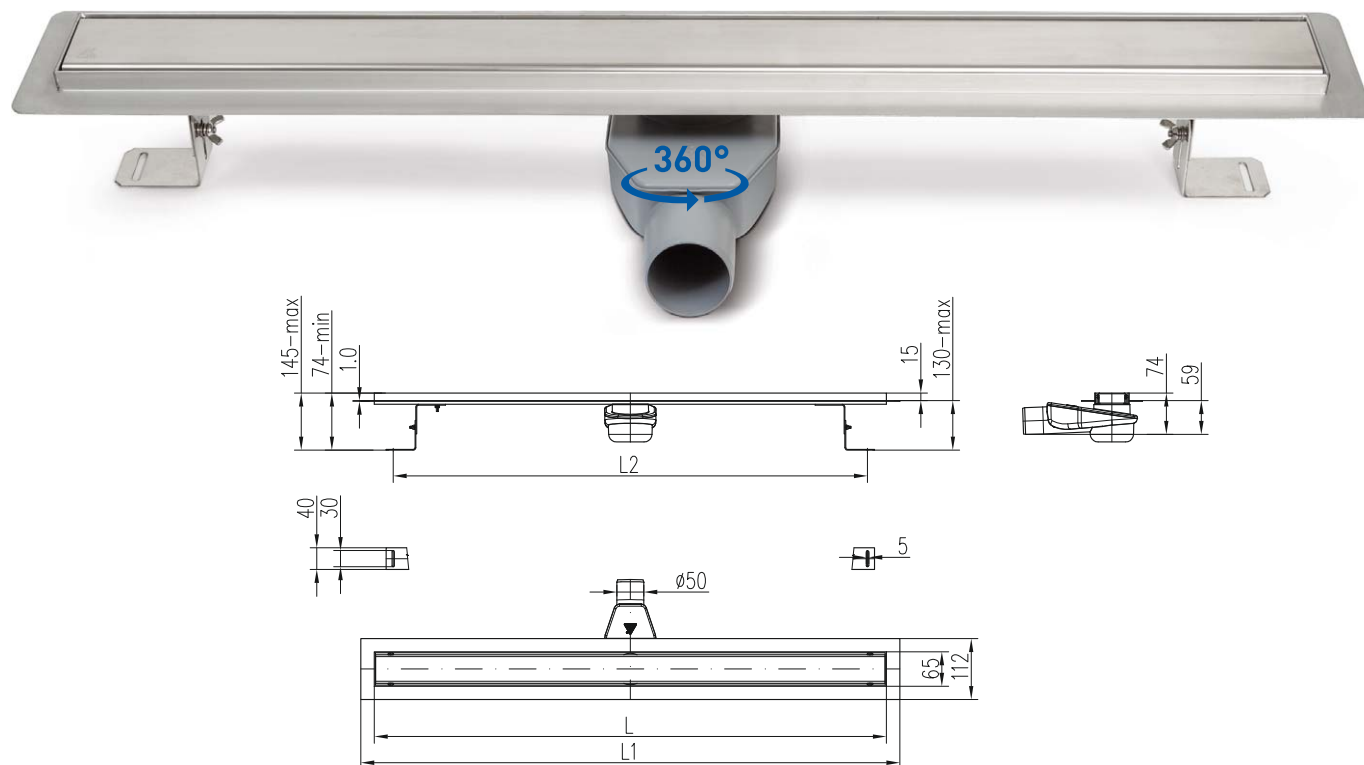

DRAIN FEATURES:


- ✓ stainless steel body
- ✓ low installation height 59 mm
- ✓ height adjustable 74-145 mm
- ✓ frame height 15 mm
- ✓ stainless steel grid 1,5 mm glossy/matt
- ✓ flow rate 42-48 l/min. according to EN 1253
- ✓ dimension range 650, 750, 850, 950, 1050, 1200 mm
- ✓ with plastic swivel siphon 360°
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	700	595	2,54
750	800	695	2,80
850	900	795	2,98
950	1000	895	3,32
1050	1100	995	3,55
1200	1250	1145	4,03

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH NA 650 H	CH NA 650 S	CH NA 650 B	CH NA 650 D	CH NA 650 M	CH NA 650 K
650 matt	CH NA 650 H 1	CH NA 650 S 1	CH NA 650 B 1	CH NA 650 D 1	CH NA 650 M 1	CH NA 650 K 1
750 glossy	CH NA 750 H	CH NA 750 S	CH NA 750 B	CH NA 750 D	CH NA 750 M	CH NA 750 K
750 matt	CH NA 750 H 1	CH NA 750 S 1	CH NA 750 B 1	CH NA 750 D 1	CH NA 750 M 1	CH NA 750 K 1
850 glossy	CH NA 850 H	CH NA 850 S	CH NA 850 B	CH NA 850 D	CH NA 850 M	CH NA 850 K
850 matt	CH NA 850 H 1	CH NA 850 S 1	CH NA 850 B 1	CH NA 850 D 1	CH NA 850 M 1	CH NA 850 K 1
950 glossy	CH NA 950 H	CH NA 950 S	CH NA 950 B	CH NA 950 D	CH NA 950 M	CH NA 950 K
950 matt	CH NA 950 H 1	CH NA 950 S 1	CH NA 950 B 1	CH NA 950 D 1	CH NA 950 M 1	CH NA 950 K 1
1050 glossy	CH NA 1050 H	CH NA 1050 S	CH NA 1050 B	CH NA 1050 D	CH NA 1050 M	CH NA 1050 K
1050 matt	CH NA 1050 H 1	CH NA 1050 S 1	CH NA 1050 B 1	CH NA 1050 D 1	CH NA 1050 M 1	CH NA 1050 K 1
1200 glossy	CH NA 1200 H	CH NA 1200 S	CH NA 1200 B	CH NA 1200 D	CH NA 1200 M	CH NA 1200 K
1200 matt	CH NA 1200 H 1	CH NA 1200 S 1	CH NA 1200 B 1	CH NA 1200 D 1	CH NA 1200 M 1	CH NA 1200 K 1

 42-48 l/min.
  64 mm
  50 mm
  K3 - 300 kg

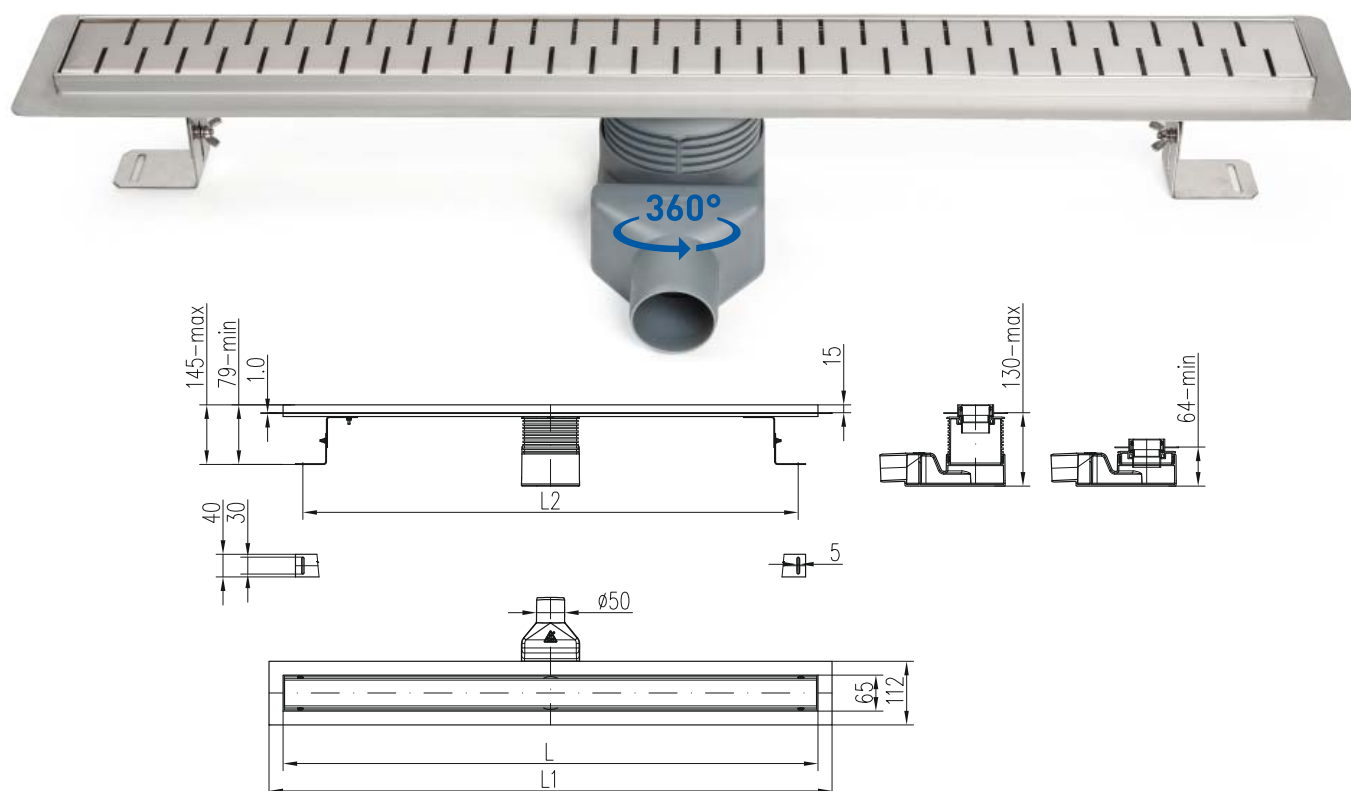

DRAIN FEATURES:

- ✓ stainless steel body
- ✓ installation height 64 mm
- ✓ height adjustable 79-145 mm
- ✓ frame height 15 mm
- ✓ stainless steel grid 1,5 mm glossy/matt
- ✓ flow rate 42-48 l/min. according to EN 1253
- ✓ dimension range 650, 750, 850, 950, 1050, 1200 mm
- ✓ swivel siphon 360°
- ✓ option with a grid for tiles

DRAIN DIMENSIONS:

L [mm]	L1 [mm]	L2 [mm]	Weight [kg/pc]
650	700	595	2,54
750	800	695	2,80
850	900	795	2,98
950	1000	895	3,32
1050	1100	995	3,55
1200	1250	1145	4,03

PART NUMBER						
	HARMONY	SQUARE	BASIC	DROPS	MEDIUM	KLASIK/FLOOR
650 glossy	CH N 650 H	CH N 650 S	CH N 650 B	CH N 650 D	CH N 650 M	CH N 650 K
650 matt	CH N 650 H 1	CH N 650 S 1	CH N 650 B 1	CH N 650 D 1	CH N 650 M 1	CH N 650 K 1
750 glossy	CH N 750 H	CH N 750 S	CH N 750 B	CH N 750 D	CH N 750 M	CH N 750 K
750 matt	CH N 750 H 1	CH N 750 S 1	CH N 750 B 1	CH N 750 D 1	CH N 750 M 1	CH N 750 K 1
850 glossy	CH N 850 H	CH N 850 S	CH N 850 B	CH N 850 D	CH N 850 M	CH N 850 K
850 matt	CH N 850 H 1	CH N 850 S 1	CH N 850 B 1	CH N 850 D 1	CH N 850 M 1	CH N 850 K 1
950 glossy	CH N 950 H	CH N 950 S	CH N 950 B	CH N 950 D	CH N 950 M	CH N 950 K
950 matt	CH N 950 H 1	CH N 950 S 1	CH N 950 B 1	CH N 950 D 1	CH N 950 M 1	CH N 950 K 1
1050 glossy	CH N 1050 H	CH N 1050 S	CH N 1050 B	CH N 1050 D	CH N 1050 M	CH N 1050 K
1050 matt	CH N 1050 H 1	CH N 1050 S 1	CH N 1050 B 1	CH N 1050 D 1	CH N 1050 M 1	CH N 1050 K 1
1200 glossy	CH N 1200 H	CH N 1200 S	CH N 1200 B	CH N 1200 D	CH N 1200 M	CH N 1200 K
1200 matt	CH N 1200 H 1	CH N 1200 S 1	CH N 1200 B 1	CH N 1200 D 1	CH N 1200 M 1	CH N 1200 K 1



Plastic body drain without grid D40

Dimension L [mm]	Part number
350	CH 350/1
450	CH 450/1
550	CH 550/1
650	CH 650/1
750	CH 750/1
850	CH 850/1
950	CH 950/1



Plastic body drain with stainless steel frame without grid D40

Dimension L [mm]	Part number
350	CH 350/1 N
450	CH 450/1 N
550	CH 550/1 N
650	CH 650/1 N
750	CH 750/1 N
850	CH 850/1 N
950	CH 950/1 N



Plastic body drain to the wall without grid D40

Dimension L [mm]	Part number
350	CH 350/2
450	CH 450/2
650	CH 650/2
750	CH 750/2
850	CH 850/2



Plastic body drain to the wall with stainless steel frame without grid D40

Dimension L [mm]	Part number
350	CH 350/2 N
450	CH 450/2 N
650	CH 650/2 N
750	CH 750/2 N
850	CH 850/2 N



Plastic body drain without grid, bottom outlet D40

Dimension L [mm]	Part number
650	CH 650/S40
750	CH 750/S40
850	CH 850/S40
950	CH 950/S40
1050	CH 1050/S40



Plastic body drain with stainless steel frame without grid, bottom outlet D40

Dimension L [mm]	Part number
650	CH 650/S40 N
750	CH 750/S40 N
850	CH 850/S40 N
950	CH 950/S40 N
1050	CH 1050/S40 N



Plastic body drain without grid D50

Dimension L [mm]	Part number
650	CH 650/50
750	CH 750/50
850	CH 850/50
950	CH 950/50
1050	CH 1050/50



Plastic body drain with stainless steel frame without grid D50

Dimension L [mm]	Part number
650	CH 650/50 N
750	CH 750/50 N
850	CH 850/50 N
950	CH 950/50 N
1050	CH 1050/50 N



Plastic body drain without grid and siphon D50

Dimension L [mm]	Part number
650	P 65
750	P 75
850	P 85
950	P 95
1050	P 105



Plastic body drain without grid and siphon D50, with stainless steel frame

Dimension L [mm]	Part number
650	P 65 N
750	P 75 N
850	P 85 N
950	P 95 N
1050	P 105 N



Stainless steel body with ALU grid, insulation and without siphon, Aquarius

Dimension L [mm]	Part number
700	3028
800	3029
900	3030



Stainless steel body with ALU grid, without insulation and siphon, Aquarius

Dimension L [mm]	Part number
700	3025
800	3026
900	3027



ALU rail for Aquarius incl. 4 adjustable support legs

Dimension L [mm]	Part number
700	3005
800	3006
900	3007



Stainless steel grid 1,5 mm for ALU rail

Dimension L [mm]	Part number
700	3013
800	3014
900	3015



Swivel siphon D50 with silicone membrane, Aquarius

Part number	3002
-------------	------



Swivel siphon D50, height adjustable

Part number	804/4
-------------	-------



Grid HARMONY

Part number Glossy	Part number Matt
H 350	H 350 1
H 450	H 450 1
H 550	H 550 1
H 650	H 650 1
H 750	H 750 1
H 850	H 850 1
H 950	H 950 1
H 1050	H 1050 1
H 1200	H 1200 1



Grid SQUARE

Part number Glossy	Part number Matt
S 350	S 350 1
S 450	S 450 1
S 550	S 550 1
S 650	S 650 1
S 750	S 750 1
S 850	S 850 1
S 950	S 950 1
S 1050	S 1050 1
S 1200	S 1200 1



Grid BASIC

Part number Glossy	Part number Matt
B 350	B 350 1
B 450	B 450 1
B 550	B 550 1
B 650	B 650 1
B 750	B 750 1
B 850	B 850 1
B 950	B 950 1
B 1050	B 1050 1
B 1200	B 1200 1



Grid DROPS

Part number Glossy	Part number Matt
D 350	D 350 1
D 450	D 450 1
D 550	D 550 1
D 650	D 650 1
D 750	D 750 1
D 850	D 850 1
D 950	D 950 1
D 1050	D 1050 1
D 1200	D 1200 1



Grid MEDIUM

Part number Glossy	Part number Matt
M 350	M 350 1
M 450	M 450 1
M 550	M 550 1
M 650	M 650 1
M 750	M 750 1
M 850	M 850 1
M 950	M 950 1
M 1050	M 1050 1
M 1200	M 1200 1



Grid KLASIK / FLOOR

Part number Glossy	Part number Matt
K 350	K 350 1
K 450	K 450 1
K 550	K 550 1
K 650	K 650 1
K 750	K 750 1
K 850	K 850 1
K 950	K 950 1
K 1050	K 1050 1
K 1200	K 1200 1



Siphon cover	GRAY • BLACK
Part number	CH 430 • CH 430 C



Attachment D50/100	
Part number	CH 465



Sealing O-ring	
For siphon cover	CH 388/3
For attachment	CH 388/2



Flap	GRAY • BLACK
Part number	CH 432 • CH 432 C



Adjustable legs	
Part number	CH 433 (47 mm) • CH 433/1 (62 mm)



Self-adhesive waterproofing membrane 1000 x 80mm	
Part number	391/7



Reducer 40/50	
Part number	CH 434



Sealing tape, width 120mm x 10m KLASIK	
Part number	391/8



Plastic hafak sifter	
For stainless steel drain	CH 460
For plastic drain	CH 460 A



Key for grid removal	
Plastic	CH 439
Stainless steel	387/1



Gasket HT D50

Part number 9810



Silicone water level D50, Aquarius

Part number 3003



Water level insert D50 Aquarius

Part number 3004



Silicone sealant for gluing tiles, 330 ml

Part number 3016




Adjustable support leg for ALU rail, 0-4 mm

Part number 3008




Additional pad for supporting legs, 5 mm

Part number 3009



Grid support for stainless steel drains

HARMONY	CH 463
SQUARE	CH 463
BASIC	CH 463
DROPS	CH 463
MEDIUM	CH 463
KLASIK	CH 462
FLOOR	CH 461

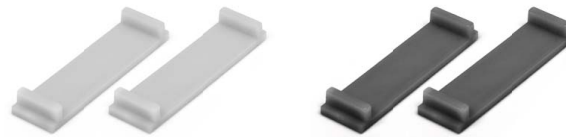

Grid support for plastic drains GRAY • BLACK

HARMONY	CH 463/1 • CH 463/1 C
SQUARE	CH 463/1 • CH 463/1 C
BASIC	CH 463/1 • CH 463/1 C
DROPS	CH 463/1 • CH 463/1 C
MEDIUM	CH 463/1 • CH 463/1 C
KLASIK	CH 462/1 • CH 462/1 C
FLOOR	CH 462/1 • CH 462/1 C





CZECH PRODUCER

Chuděj s.r.o.

HUTISKO 310
756 62 HUTISKO-SOLANEC
CZECH REPUBLIC
TEL.: +420 723 126 125
+420 571 757 745
FAX: +420 571 757 737
export@chudej.cz
 Chuděj sro



www.chudej.cz